

Type 2S Small Latch Showing Variable 'Setbacks'*

Variable 'Setbacks'*


(Hex Hole Locations)

Latches: S1125-2S-375

Thru S1125-2S-1.062

'Setbacks'* (Hex. Hole Locations) Are Stocked From .375"/9.5mm to 1.062"/27mm, in .062"/1.6mm increments

(See Fig. 1 A thru L on TDS 61-4 which follows)

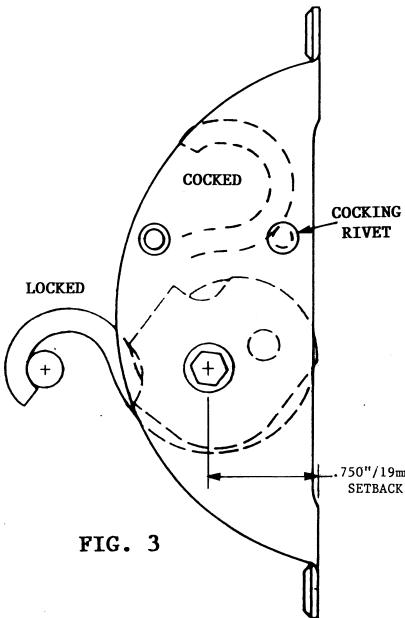

Type 2SR Small Latch Reverse Mounted

Reverse Mounted Latch Mechanism

Latch Shown: S1125-2SR-750

The Type 2SR Latch has the Latch mechanism installed in Reverse, as required by certain applications. These Latches are available with the same variations of 'Setback'* as the Type 2S (See TDS 64 & 71)

A P P L I C A T I O N S

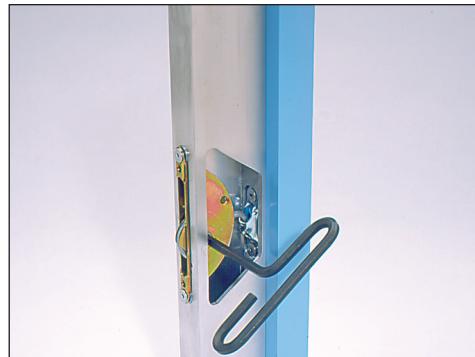


Fig. 7A, 7B, 7C Joining sheet metal units with a Type 2S Latch is accomplished using a slot receiver. Operation of the Latch can be done via an access hole as shown, or from the rear. (See TDS 72)

